

AC 46

Self Contained Ice Machine 25 kg

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front panel mount ON-OFF switch.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- Legs are not included and must be ordered separately as an accessory.



AC M 46
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

9 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

| | Minimum | Maximum |
|--------------------|----------------|----------------|
| Air temperature | 10 | 43 |
| Water temperature | 5 | 38 |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 25 kg

AC 46

Self Contained Ice Machine 25 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |

Self Contained Ice Machine 25 kg

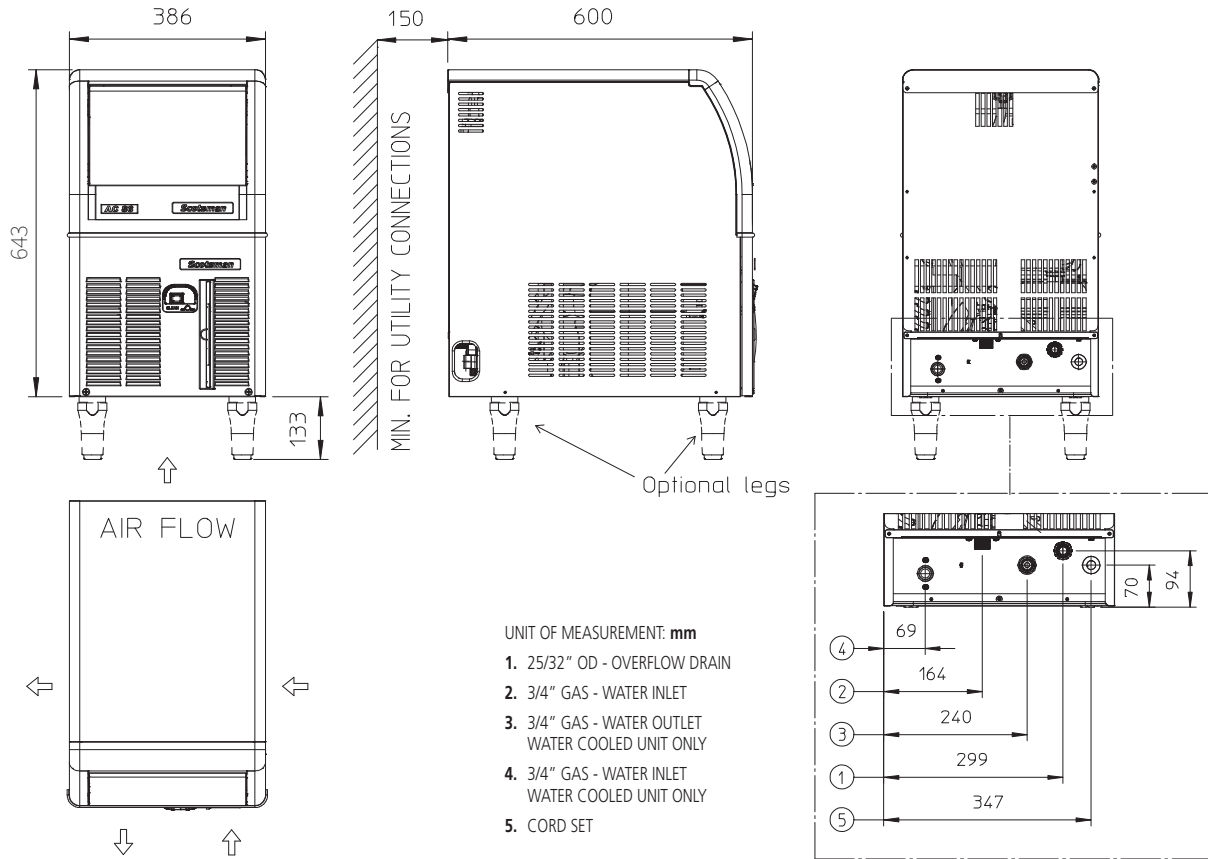

| UNIT DATA | | SHIPPING DATA | | | | | | | | | |
|------------------|--------------------|--|--------------------|-----------------|------------------------|-------------|-----------------|---------------|------------|---------------|----------------|
| Size (W x D x H) | 386 x 600 x 645 mm | Carton (W x D x H) | 460 x 670 x 760 mm | | | | | | | | |
| Net weight | 35 kg | Weight | 42 kg | | | | | | | | |
| Version | Voltage | 24 h ice production kg °C Amb. / °C Water | | | Energy consumption (*) | | Water usage (*) | Instant power | Compressor | Circuit wires | Max. fuse size |
| | | 10°C/10°C kg | 21°C/10°C kg | 32°C/21°C kg | kWh/ 100 kg | kWh/ 24h | l/h | W | W | No. x Ømm² | A |
| ACM 46 AS | 230/50/1 | 25 | 23 | 19 | 40.8 | 8.0 | 3.2 | 350 | 800 | 3 x 1.5 | 10 |
| ACM 46 WS | 230/50/1 | 25 | 23 | 21 | 31.0 | 6.5 | 27.3 | 350 | 800 | 3 x 1.5 | 10 |
| ACM 46 AS | 230/60/1 | 25 | 24 | 20 | 42.3 | 8.3 | 3.4 | 450 | 900 | 3 x 1.5 | 10 |
| ACM 46 WS | 230/60/1 | 25 | 24 | 20 | 42.3 | 8.3 | 27.3 | 450 | 900 | 3 x 1.5 | 10 |

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions