

AC 176

Self Contained Ice Machine 83 kg




Item #:
Project:
Quantity:




FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Routine maintenance visible alarm light on front panel. Water system protected by patented anti-scale system.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.

Self Contained Ice Machine 83 kg

 <p>AC L 176 Large Gourmet 39 g Ø 38 x H 41 mm</p>  <p>AC M 176 Medium Gourmet 20 g Ø 30 x H 34 mm</p>  <p>AC S 176 Small Gourmet 8 g Ø 21 x H 25 mm</p>	<p>CONDENSING SYSTEM</p> <p>Air cooled Water cooled</p>	<p>INTERNAL BIN CAPACITY</p> <p>48 kg</p>
	<p>REFRIGERANT GAS</p> <p>R134a R404A</p>	
	<p>VOLTAGE V/Hz/ph</p> <p>230/50/1 230/60/1</p>	

CERTIFICATIONS	OPERATING REQUIREMENTS		
		Minimum	Maximum
	Air temperature	10	43
	Water temperature	5	38
	Water pressure	1 bar (14 psi)	5 bar (70 psi)
	Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.


www.scotsman-ice.it
www.scotsman-ice.com

AC 176

Self Contained Ice Machine 83 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 83 kg

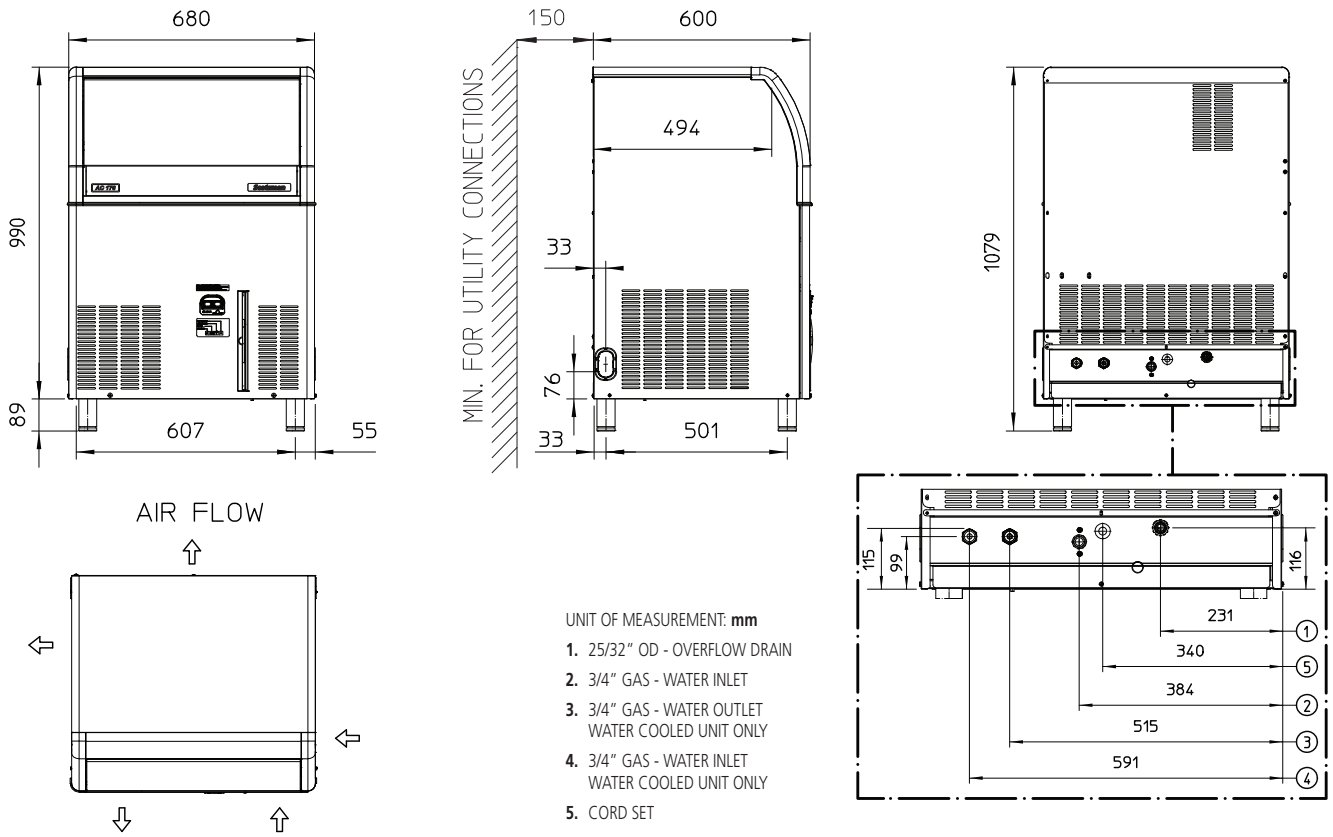

UNIT DATA		SHIPPING DATA										
Size (W x D x H)		680 x 600 x 1079 mm		Carton (W x D x H)		750 x 670 x 1170 mm						
Net weight		70 kg		Weight		80 kg						
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A	
ACL 176 AS	230/50/1	71	69	59	29.7	17.5	10.0	1000	2070	3 x 1.5	10	
ACL 176 WS	230/50/1	71	70	58	25.9	15.0	79.2	610	1504	3 x 1.5	16	
ACM 176 AS	230/50/1	83	82	69	26.8	18.5	8.5	1000	2070	3 x 1.5	16	
ACM 176 WS	230/50/1	80	78	70	25.7	18.0	62.0	800	2070	3 x 1.5	16	
ACS 176 AS	230/50/1	70	69	55	29.1	16.0	9.6	900	1500	3 x 1.5	16	
ACS 176 WS	230/50/1	70	69	55	29.1	16.0	79.2	760	1500	3 x 1.5	16	
ACL 176 AS	230/60/1	85	83	65	26.0	17.0	9.6	860	1800	3 x 1.5	16	
ACM 176 AS	230/60/1	85	80	70	30.4	21.0	7.5	1200	2419	3 x 1.5	16	
ACM 176 WS	230/60/1	86	80	69	28.0	19.0	54.0	870	2420	3 x 1.5	16	
ACS 176 WS	230/60/1	72	66	57	32.4	18.8	87.5	750	1070	3 x 1.5	16	

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions