

EC 126 *XSafe*

Self Contained Ice Machine 70 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior. Advanced diagnostics computerized control.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC L 126
Large Gourmet 39 g
Ø 38 x H 41 mm

EC M 126
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a
R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

39 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 70 kg

EC 126 XSafe

Self Contained Ice Machine 70 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 70 kg

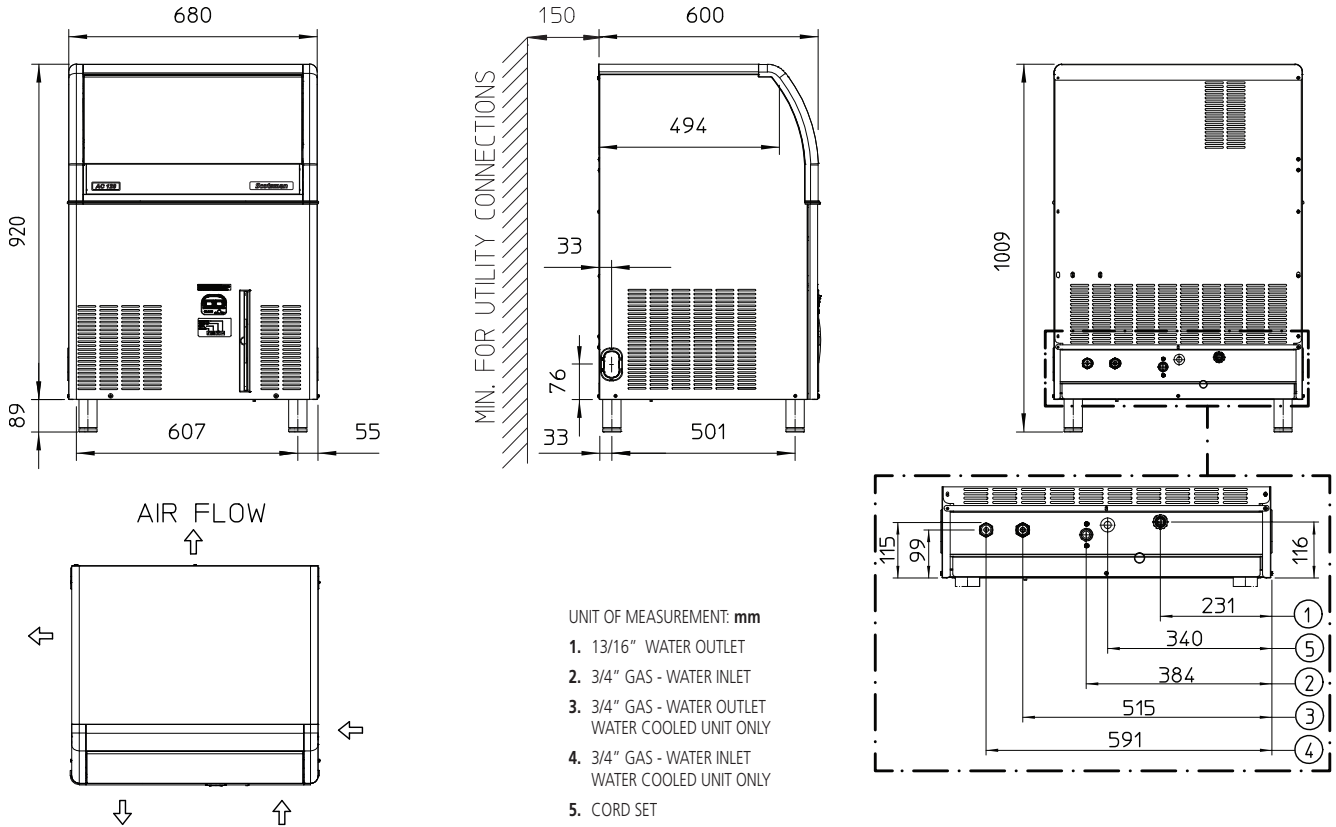

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	680 x 600 x 1009 mm	Carton (W x D x H)	750 x 670 x 1100 mm								
Net weight	67 kg	Weight	77 kg								
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
ECL 126 AS	230/50/1	63	61	49	28.6	14.0	5.8	770	1440	3 x 1.5	10
ECL 126 WS	230/50/1	70	66	58	24.1	13.0	68.8	600	1440	3 x 1.5	10
ECM 126 AS	230/50/1	70	66	55	24.6	13.8	5.7	740	1450	3 x 1.5	10
ECM 126 WS	230/50/1	74	71	60	20.5	12.3	70.8	580	1450	3 x 1.5	10
ECM 126 AS	230/60/1	80	77	60	24.7	14.8	6.3	750	1880	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions